



## SP50 Extra Power Sumpcleaner/Filter - Propane

*The Extra Power Sumpcleaner is recommended for fast removal of coolants and solids in large operations. Twenty horsepower propane engine powers fast removal of coolant and solids from machine tools. Large capacity filter holds five cubic feet of solids.*


- Available in 175, 300, 400, 500 and 600 gallon capacity.
- Pumping rate to 110 gallon per minute.
- Generates suction to 13" Hg (Mercury) or 177" water.
- Twenty Horsepower engine.
- Large capacity filter.

*The Extra Power unit is also available as a Combination Sumpcleaner/ Filter. and Coolant Dispenser.*



SP50-175PT Extra Power Propane Sumpcleaner/Filter.

**Caution: Machines must not be used for flammable fluids (fuels, paints, solvents, etc.) . Avoid use in extra-high temperature or spark-hazard environments (ovens, welding areas, etc.) .**

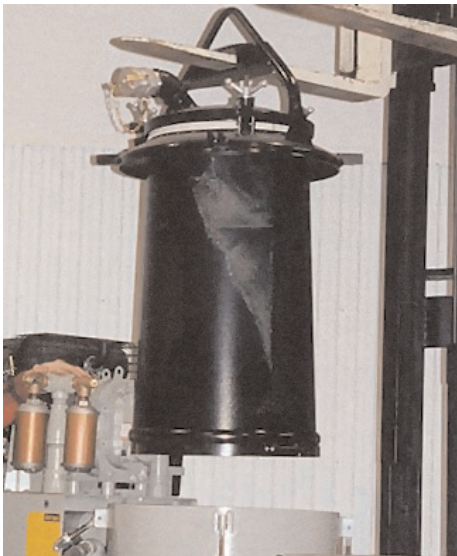

### F50 - 5.0 Cubic Foot Filter

The CECOR Extra Power Sumpcleaner has an extra capacity filter, the F50. The filter consists of a perforated metal outer basket with a polypropylene mesh liner sleeve. The sleeve provides a continuous filter, unbroken by slits or openings which can leak solids into the coolant. Filter also features a built-in lifting bail, anti-bridging reverse tapered sides and patented positive locking latch. Fittings for fork lift handling are integral to the two-piece cover. The F50 filter is standard on all SP50 units. Optional fine weave polypropylene filter sleeve available.

**Tank Size:** 175, 300, 400, 500 and 600 gallon capacity.

**Engine:** 20 HP Propane Engine.

**Pump:** Lobe Type, Positive Displacement air pump.

**Suction Lift:** 13" Hg (Mercury) or 177" water.

**Filter:** F50 Filter has 5 cubic feet capacity. Can hold up to 800 lbs. Features built-in lifting bail, anti-bridging reverse tapered sides and patented positive locking latch.

**Filter Sleeve:** Available in regular and fine polypropylene sleeves.



SP50-175PL6 Extra Power Propane Sumpcleaner/Filter.

**Overflow Prevention:** Automatic overflow protection. All discharge ports are valved.

**Pressure Discharge:** 6 PSI (pounds per square inch) with safety back up valve.

**Pumping Rate:** Up to 110 gallons per minute.

**Hoses:** 2" I.D. x 16' oil-resistant PVC hose including quick-disconnect coupler and suction tools. Separate return hose of heavy-section clear plastic 1 1/4" I.D. x 16' with full-flow shut-off nozzle.

**Cleaning Tools:** Flared Nozzle  
Flexible Nozzle  
Straight Nozzle

See page 33 for information on base options.

**Options**

Model Number	Tank Size	Cleanout Door	Transport	Wheels	Dimensions	Shipping Weight	Options											
							TW Base	PL6 Base	PLM Base	CB1 Base	CB2 Base	CB3 Base	CB4 Base	CB5 Base	F50 Filter	Floor Squeegee		
SP50-175PT	175 gallon	8" x 10" with a 1 1/4" drain port	PT Base for push or tow transport	Two 12" x 3" poly wheels and one 8" x 3" poly caster	80" long 34" wide 63" high	1268 lbs.	X	X	X	X	X	X	X	X	X	X	X	X
SP50-300TW	300 gallon	16" diameter hinged door with a 2 1/2" drain port.	TW Base - Tow Bar with pintle-eye hitch to accommodate most in-plant tugs or tractors.	Two heavy-duty 16" x 4" wheels and one 12" x 3" swivel casters.	96" long 42" wide 71" high	1547 lbs.	S	NA	X	X	X	X	X	X	X	X	X	
SP50-400TW	400 gallon			Two heavy-duty 16" x 4" wheels and two 12" x 3" swivel casters.	99" long 46" wide 77" high	1953 lbs.	S	NA	X	X	X	X	X	X	X	X	X	
SP-500TW	500 gallon			Two 16" x 5" wheels and two 12" x 3" swivel casters.	111" long 48" wide 79" high	2038 lbs.	S	NA	X	X	X	X	X	X	X	X	X	
SP50-600CB1	600 gallon			CB1 Base - Custom base for mounting on trailer or truck.	Not applicable.	121" long 42" wide 69" high	2132 lbs.	NA	NA	NA	X	X	X	X	X	X	X	

NOTE: Engineering specifications subject to change without notice.

X = Available  
S = Standard  
NA = Not Available



102 Lincoln St. Verona, WI 53593 1-800-356-9042  
Fax: 608-845-6792 E-mail: cecor@cecor.net website: www.cecor.net